

APPLICATIONS

Legion's shallow My-T-Lite Inch series is the ideal selection for limited space and under-cabinet installations. The shallow nominal depth of 1" allows our My-T-Lite Inch luminaire to blend unobtrusively with your decor. The low silhouette design fits anywhere and solves many application problems, providing superior task lighting.

A high-quality, ultra thin specification grade fluorescent luminaire formed of heavy gauge steel, with concealed ballast mounting screws.

The choice of designers, and specifiers for homes, schools, banks, offices, hospitals etc. Available in five sizes and wattages. Easily installed and maintained.



SPECIFICATIONS

CONSTRUCTION: Die formed of heavy gauge steel. Ballast compartment is designed with concealed screws eliminating exposed hardware.

MOUNTING: All My-T-Lite Inch fluorescents can be mounted individually or in continuous rows, knockouts provided at both ends for feed-thru and entry.


BALLAST: All My-T-Lite Inch fluorescents are wired with electronic Class "P" thermally protected ballast(s), or T5 rapid quick start 460MA for 14W, 21W, & 28W Electronic High Power Factor, Class A sound rated, < 10% THD (less than 10% Total Harmonic Distortion), FCC Listed for Type 1 for 118 volt 60 Hz operation. Other voltages and frequencies available. **CONSULT FACTORY.** All electrical components mounted on wiring channel for ease of installation and servicing.

ELECTRICAL: Grounded convenience outlet optional (not installed). Optional 3/8" greenfield conduit connection fitting can be supplied for special situations. All electrical components mounted on wiring channel for ease of installation and servicing.

SHIELDING: White opaque front, with clear linear prism bottom acrylic plastic wrap around diffuser standard, destaticized and flexible, easily snaps in and out for relamping. Optionally available all white translucent 100% DR acrylic (see OPTIONS).

FINISH: Baked white enamel over rust inhibiting phosphate coat. 86% reflectance minimum.

CERTIFICATION: The Series 320 is U.L. and C.U.L. listed and bears the label of the I.B.E.W./AFL-CIO, Local #3.

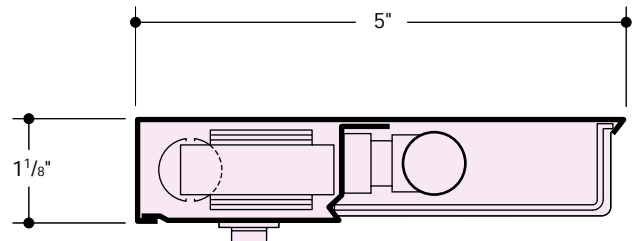

LEGION® is a registered trademark of LEGION LIGHTING CO., INC.

01/03



Section C – Page 61

ORDERING DATA

	Catalog No.	No. and Type Lamps	Length
STANDARD T5	320-8-ACP	1-F8T5-PH	12 ¹ / ₄ "
	320-13-ACP	1-F13T5-PH	21 ¹ / ₄ "
	320-28-ACP	2-F8T5-PH	24 ¹ / ₂ "
	320-8/13-ACP	1-F8T5-PH	33 ¹ / ₂ "
		1-F13T5-PH	
320-213-ACP	2-F13T5-PH	42 ¹ / ₂ "	
PENTRON T5	320-114-ACP	1-F14T5	22 ⁹ / ₁₆ "
	320-121-ACP	1-F21T5	34 ⁷ / ₁₆ "
	320-128-ACP	1-F28T5	46 ⁷ / ₃₂ "

PENTRON® is a registered trademark of OSRAM SYLVANIA PRODUCTS, INC.

OPTIONS

Suffix "RSW" after catalog no. for positive position rocker switch.
 Suffix "GCO" after catalog no. for grounded convenience outlet (not installed).
 Suffix "CP" after catalog no. for 6 ft. cord and plug.
 Suffix "GCC" after catalog no. for 3/8" greenfield/conduit connector.
 Suffix "FB" after catalog no. for fuse and fuseholder.
 Suffix "ACW" after catalog no. for white acrylic 100% DR diffuser.

BACK PLAN

