

APPLICATIONS

The PARALUME® III series of static and air handling troffers are designed for individual or continuous row installations in data processing areas, offices, schools, stores and libraries. The deep cell anodized aluminum louver eliminates glare and ceiling reflections when used in task situations.



SPECIFICATIONS

HOUSING: Die formed of 20 ga. cold rolled steel, rigidly fabricated, and electrically welded to insure true and perfect alignment.

SOCKET PLATE: Die formed of code gauge cold rolled steel, securely mounted and readily removable for socket maintenance.

REFLECTOR: Die formed of code gauge cold rolled steel, securely mounted to housing. Formed to optically correct contour to provide maximum efficiency, removable to access wiring without the use of tools. XTA-XTRALUME® energy efficient reflector available (see OPTIONS).

LOUVER: Large cell parabolic louver fabricated from semi-specular anodized low iridescence aluminum. Blades are precisely formed and rigidly assembled to maintain parabolic contour and assure proper surface brightness control. The louver assembly hinges from either side allowing access to the interior without the use of tools and floats within the housing in a fully bordered matte black reveal.

ELECTRICAL: Thermally protected Class "P" Energy Saving Instant Start HPF 265MA-T8, 270MA-Biax (Twin Tube) electronic ballasts standard for 118V 60 Hz operation. Other voltages and frequencies available, consult factory.




MOUNTING: Designed to integrate into most standard ceilings. Quick Mount leveling jacks are supplied on concealed mechanical units only. For grid type ceilings, unit rests on the flanges of the exposed spline or tee. Fine Line clips are supplied on units used in Donn-Fine Line type ceilings. See ceilings and specify type. Knockouts provided on back and ends for feed and thru-wiring.

AIR HANDLING: Designed to perform as a static, air supply or air return unit, (see AIR HANDLING function). Compatible with all major air supply diffusers (supplied by others).


FINISH: All steel components parts are completely protected against rust and discoloration after fabrication through an automated conveyorized multi-stage phosphate bonding process. Finished with an electrostatic baked white polyester thermosetting powder coating. This electronic computer controlled integrated system assures consistent 88%+ reflectance efficiency and maximum durability.

CERTIFICATION: The PARALUME® III is U.L. and C.U.L. listed and bears the label of the I.B.E.W./AFL-CIO, Local #3. Optionally U.L. and C.U.L. listed for damp locations "DL".


PARALUME®, XTRALUME® and LEGION® are registered trademarks of LEGION LIGHTING CO., INC.

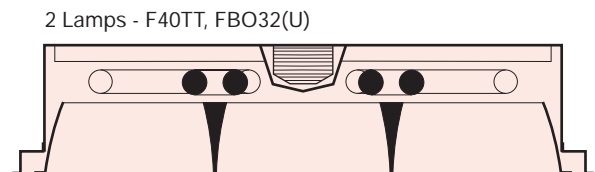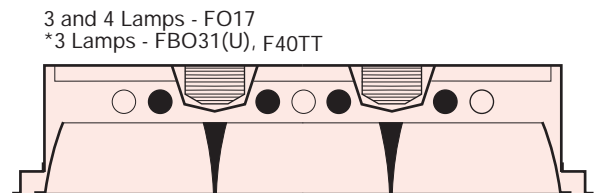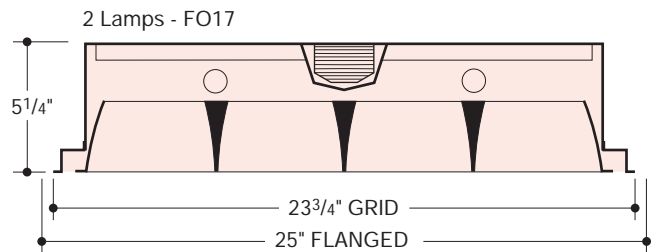


LOUVERS



•• PB4/3
4 CELL



PB9/3
9 CELL



PB16/3
16 CELL

•• Refer to OPTIONS on reverse side

1/04

ORDERING DATA

Catalog No.	No. and Type	Specify Ceiling	Louver No. of Cells	Wt.	Nom. Size
372-217-PB9/3	2-F017-OCT-T8	*F, J, S	9	29	2x2
372-217-PB16/3	2-F017-OCT-T8	*F, J, S	16	30	
372-317-PB9/3	3-F017-OCT-T8	*F, J, S	9	32	
372-317-PB16/3	3-F017-OCT-T8	*F, J, S	16	33	
372-417-PB9/3	4-F017-OCT-T8	*F, J, S	9	32	
372-417-PB16/3	4-F017-OCT-T8	*F, J, S	16	33	
372-2U32-PB9/3	▲ 2-FB032-OCT-T8	*F, J, S	9	29	
372-2U32-PB16/3	▲ 2-FB032-OCT-T8	*F, J, S	16	30	
372-3U31-PB9/3	■ 3-FB031-OCT-T8	*F, J, S	9	29	
372-3U31-PB16/3	■ 3-FB031-OCT-T8	*F, J, S	16	30	
372-2BX40-PB9/3	** 2-F40TT/RS	*F, J, S	9	29	
372-2BX40-PB16/3	** 2-F40TT/RS	*F, J, S	16	30	
372-3BX40-PB9/3	** 3-F40TT/RS	*F, J, S	9	32	
372-3BX40-PB16/3	** 3-F40TT/RS	*F, J, S	16	33	

SPECIFY U-LAMP SPACING

- ▲ Lamp spacing made for 6" center U-lamps or 1 5/8" center Octic U-lamps. For 1 5/8" center T8 lamps change U32 to U31. Example: **372-2U31-PB9/3**.
- Lamp spacing made for 1 5/8" center U-lamps only.
- * Advise run lengths when used in continuous runs.
- ** F40TT/RS is the ANSI designation of various lamp manufacturers, i.e.: G.E. Lighting "BIAX", Phillips "PL", Osram "Dulux L", Sylvania TWIN TUBE. For F50TT/RS change cat. no. Ex: **372-2BX50-PB9/3** etc. and consult factory. Other louver cellular patterns available, see OPTIONS and consult factory. For 3x3 and 4x4 units, consult factory for availability.

CEILINGINGS

- + Type (F) Flanged, Wet plaster ceiling. (Requires plaster frame, optional) suffix PF.
 - + Type (F) Flanged, Concealed "Z" spline ceiling, Z splines must face outward from troffer.
 - + Type (F) Flanged, Metal pan 1" "T" bar only and Simplex Ceiling.
 - + Type (F) Flanged, Armstrong ATS - snap bar must run perpendicular to side of troffer - Mount on black iron.
 - ++ Type (J) Exposed inverted "T" ceiling.
 - ++ Type (J) Concealed inverted "T" ceiling.
 - ++ Type (J) Exposed inverted "T", Tegular ceiling.
 - ++ Type (J) Exposed inverted "T", Fineline ceiling. (Req's. Fineline clips) suffix FLC.
 - + Type (S) Flush, Wet plaster ceiling. (Requires plaster frame, optional) suffix PF.
 - + Type (S) Flush, Concealed "Z" spline ceiling, Z splines must face outward from troffer.
 - + Type (S) Metal pan 1" "T" bar only and Simplex ceiling.
- + (F) Flanged and (S) Flush troffers provided with Quick Mount leveling jacks.
 ++ (J) Exposed (J) Concealed troffers: The corners of the ceiling opening should be well supported to withstand the weight of the troffer.

OPTIONS


- Suffix "DIM" after catalog no. for dimming ballast.
- Suffix "LT" after catalog no. for cold weather ballast.
- Suffix "EM" after cat. no. for emergency battery pack, see price list for types.
- Suffix "DL" after catalog no. for damp location.
- Suffix "PB9/3" after catalog no. for 9 cell louver.
- Suffix "PB12/3" after catalog no. for 12 cell louver.
- Suffix "PBL12/3" after catalog no. for 12 cell Lateral Blade louver.
- Suffix "WH" after catalog no. for White finish on louver.
- Suffix "SSG" after catalog no. for Semi-Specular Gold finish on louver.
- Suffix "XTA" after catalog no. for XTRALUME® reflector standard with 85% reflectance, for 95% reflectance please specify your requirements.
- Consult factory for availability and minimum quantity order.

ENERGY SAVING BALLASTS Where applicable (consult factory). Suffix "ESB" after catalog number, then / and then one of the following:

- MAGNETIC** "OCT"-Octron T8 Ballast
- ELECTRONIC** "EBO"-Electronic T8 Octron Ballast
- "EBDO"-Electronic T8 Dimming Ballast


SPECIFY AIR HANDLING FUNCTION (Suffix after catalog no.)

- AS** - Air Supply/Return - slots in 2 sides, parallel to lamps.
- ST** - Static - No slots.
- PC** - For Air Pattern Control Blades.

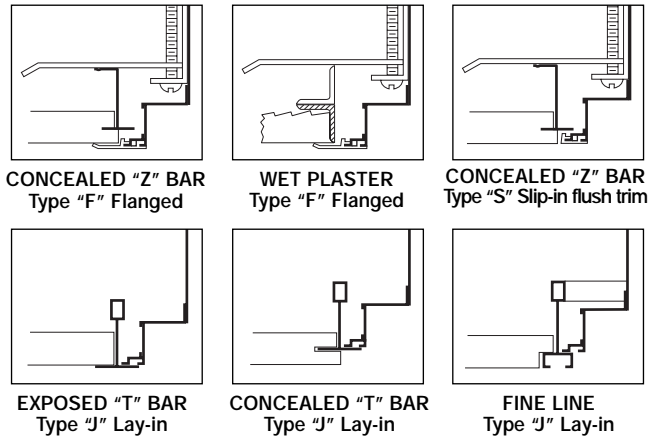

PHOTOMETRIC DATA

Cat. No. 372-2U32-PB4/3
 9 Cell 3" deep Semi-Specular Aluminum Louver
 Lamps: (2) FBO32-OCT-T8 each rated 2800 lumens.
 Total Luminaire Efficiency = 65.3%
 Plane 0-Deg. 90-Deg.
 Spacing Criteria 1.2 1.3
 Shielding Angles 24 24



Zonal Lumen Summary			
Zone	Lumens	% Lamp	% Fixt.
0-30	1195	20.4	31.2
0-40	1957	33.3	51.0
0-60	3520	60.0	91.8
0-90	3835	65.3	100.0

Coefficients of Utilization - Zonal Cavity Method									
Floor	20%								
	80%			70%			50%		
Ceiling	70%	50%	30%	70%	50%	30%	70%	50%	30%
Walls	70%	50%	30%	70%	50%	30%	70%	50%	30%
0	.78	.78	.78	.76	.76	.76	.73	.73	.73
1	.73	.70	.68	.71	.69	.67	.66	.65	.63
2	.68	.63	.60	.66	.62	.59	.60	.57	.55
3	.63	.57	.53	.61	.56	.52	.54	.51	.48
4	.58	.51	.46	.56	.50	.45	.49	.45	.41
5	.53	.45	.40	.52	.45	.40	.43	.39	.36
6	.49	.41	.35	.47	.40	.35	.39	.34	.31
7	.45	.36	.31	.44	.36	.31	.35	.30	.27
8	.41	.33	.27	.40	.32	.27	.31	.27	.23
9	.38	.29	.24	.37	.29	.24	.28	.23	.20
10	.35	.26	.21	.34	.26	.21	.25	.21	.18

Visual Comfort Probability					
Average 100 FC, Reflectances 80/50/20					
Room Size	0° Plane Ceiling Ht.		90° Plane Ceiling Ht.		
	W	L	8.5	10.0	
20	20	71	63	71	62
30	30	80	73	80	72
30	60	83	76	81	75
60	30	80	75	80	75
60	60	83	78	81	77

Average Luminance (Footlamberts)		
Vertical Angle	Horizontal Plane	
	0°	90°
45	1315	1668
55	1189	1935
65	754	415
75	62	66
85	11	11

Information supplied primarily for illustrative purposes, subject to change. Consult factory for verification and minimum quantity orders. Photometrics and/or performance summaries for your particular layout available, consult factory.

