


APPLICATIONS

The PERF-ROUND™ compact fluorescent luminaire series 505 offered in two sizes, utilizes energy efficient Twin Tube, 2D and Biax lamps providing high light output combined with a soft harmonious glare-free perforated perimeter band, making the environment appealing. Harshness is eliminated by providing a soft blend to the mounting surface.

For use in Offices, Showrooms, Lobbies, Schools, Corridors, Libraries, Hospitals and Conference Rooms.

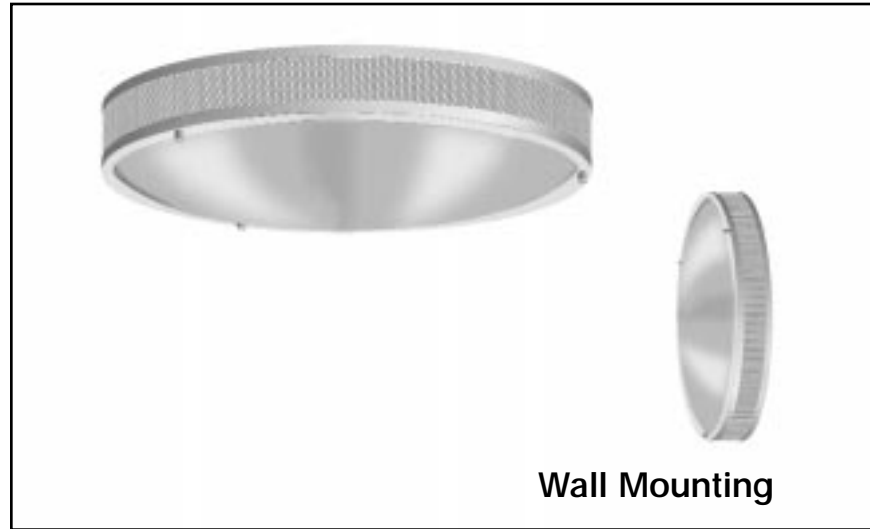

SPECIFICATIONS

HOUSING: Formed of code gauge cold rolled prime steel, rigidly fabricated, with heavy gauge perforated metal perimeter band precision formed and electrically welded in place and integrated with a white acrylic overlay.

SHIELDING: White .125" thick translucent acrylic convex dome.



DOOR: Heavy gauge roll formed steel which is held to the housing by means of 3 finial knobs @ 120°, and provided with safety chains, which can be lowered for relamping without the use of tools.

ELECTRICAL: 1, 2 or 3 lamp ballast for Twin Tube, BIAx or 2D lamps, for 118 volt 60 Hz operation, class "P" rated. See ORDERING DATA and consult factory for other voltages and frequencies.

MOUNTING: Can be mounted on ceiling surface or wall mounted, over outlet box. Provided with center knockout and knockout for feed entry, with (4) 1/4" dia. holes at 90° for mounting.

FINISH: All steel component parts are protected against rust and discoloration after fabrication through an automated conveyORIZED multi-stage phosphate bonding process. Finished standard white baked polyester thermosetting powder coating. This electronic computer controlled integrated system assures consistent 88%+ reflectance efficiency and maximum durability. Available in Black finish (see OPTIONS).

CERTIFICATION: The Perf-Round™ Series 505 luminaire is U.L. and C.U.L. listed and bears the label of the I.B.E.W./AFL-CIO, Local #3. Optionally listed for damp locations (see OPTIONS).

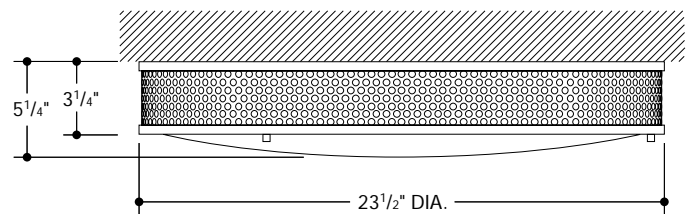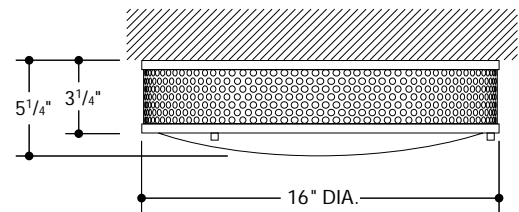


PERF-ROUND™ is a trademark of LEGION LIGHTING CO., INC.
LEGION® is a registered trademark of LEGION LIGHTING CO., INC.

ORDERING DATA


Catalog No.	No. and Type Lamps	Socket Base	Nom. Dims.		Wt.
			Depth	Dia.	
▲ 505-16-3F13TTC-ACW	3-13W/7T4-TWIN	GX23	5 1/4"	16"	10
■ 505-16-2F18TTC-ACW	2-18W/7T4-TWIN	2G11			11
■ 505-1F282D-ACW	1-28W/8/2D	GR1109-4			9
■ 505-1F382D-ACW	1-38W/8/2D	GR1109-4			9
■ 505-24-3F18TTC-ACW	3-18W/10/T5-TWIN	2G11	5 1/4"	23 1/4"	12
■ 505-24-3F27TTC-ACW	3-18W/10/T5-TWIN	2G11			12

- Electronic "HPF" Ballast for 4-pin lamps supplied in all 18W, 26W, 27W, and 2D Units.
- ▲ Magnetic "LPF" Ballast for 2-pin lamps supplied in 13W units.

OPTIONS

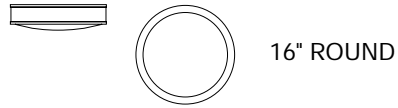

- * Suffix "BLK" after cat. no. for black finish exterior housing.
- * Suffix "BLKD" after cat. no. for black finish on door only.
- Suffix "EXC" after cat. no. for extension collar.
- Suffix "LT" after cat. no. for low temperature ballast (consult factory for availability).
- Suffix "DL" after cat. no. for damp location.
- ** Suffix "EM" after cat. no. for emergency battery pack (consult factory for availability).
- * Other colors available – consult factory for availability and minimum quantity order.
- ** May require an additional collar or need to be remote mounted - consult factory.

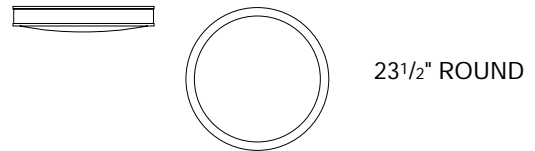

- * Suffix "BLK" after cat. no. for black finish exterior housing.
- * Suffix "BLKD" after cat. no. for black finish on door only.
- Suffix "EXC" after cat. no. for extension collar.
- Suffix "LT" after cat. no. for low temperature ballast (consult factory for availability).
- Suffix "DL" after cat. no. for damp location.
- ** Suffix "EM" after cat. no. for emergency battery pack (consult factory for availability).
- * Other colors available – consult factory for availability and minimum quantity order.
- ** May require an additional collar or need to be remote mounted - consult factory.