



INSTRUCTION SHEET




WIRING DIAGRAM

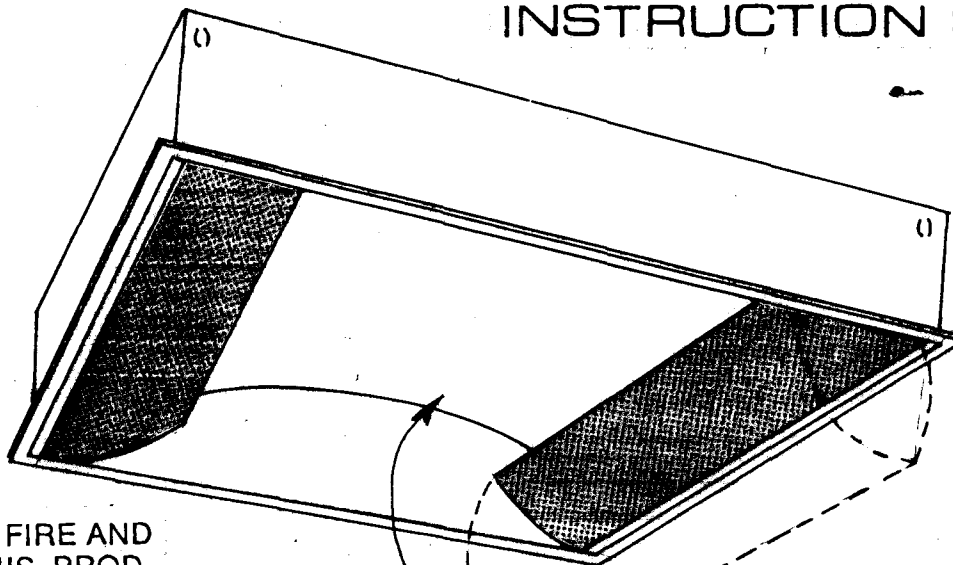

Reflector snaps out for access to wiring


Perforated diffusing element hinges down for relamping & socket maintenance.

WARNING: RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS TO BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY.

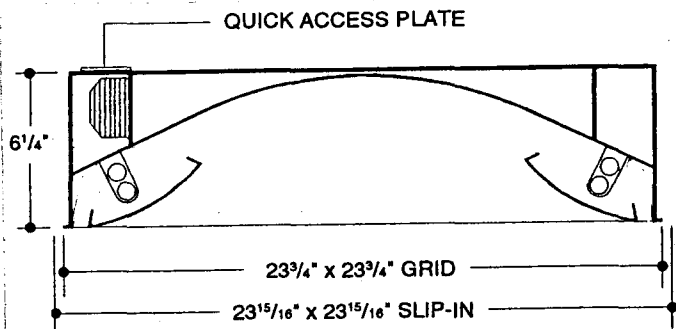

ORDERING DATA

Nominal Size	No. and Type Lamps	Specify Ceiling	Weight	Catalog No.
2' x 2'	▲ 2-F40TTRS	J, S	29	582-2BX40
2' x 2'	▲ 2-F50TTRS	J, S	29	582-2BX50

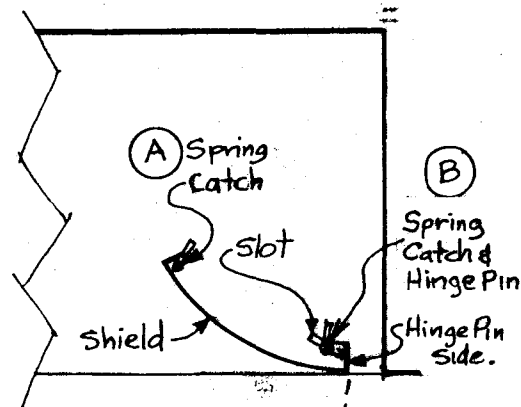

TO RELAMP:

Release spring catch (A) at each end and swing shield down on spring catch (B) into open position

TO REMOVE OR INSTALL REFLECTOR:

Remove or INSTALL 4 SCREWS THAT SECURE reflector in place. Drop down and remove from fixture. To install reflector reverse procedure, and secure in place with the 4 screws.

