


Cove-Illume™

FLUORESCENT
COVE
LIGHTING


SELECTOR GUIDE

APPLICATIONS :


- *Commercial Lighting*
- *Valances*
- *Coves & Soffits*



SIDE
MOUNT



BOTTOM
MOUNT



CONCEALED
MOUNT

LEGION®
LIGHTING CO., INC.

COVE

APPLICATIONS :

Designed to allow end-to-end or overlapping lamps for continuous even lighting or dramatic scallop effect.

For commercial lighting in Valances, Coves, Displays, and Soffits. In Offices, Conference Rooms and Public Spaces.


Curve it your way!

Unlimited Radius Configurations



UP – DOWN, ALL AROUND


1500 CHANNEL (END VIEW)

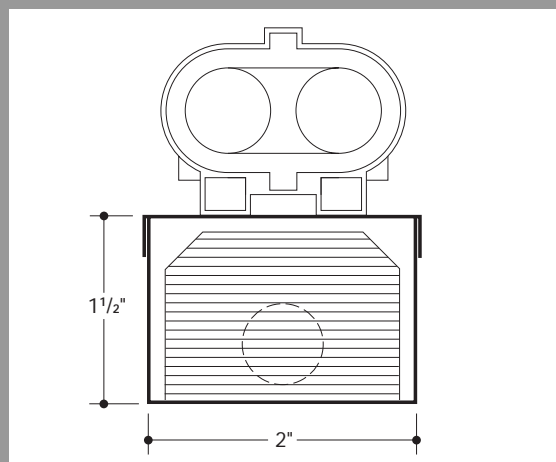

TYPE AF 1500




FLEXIBLE END TO END (available in 8 ft. lengths, assembled)




* = 2⁵/₈" Sockets: G23d, GX23d / 3" Socket: 2G11

TYPE BF 1500

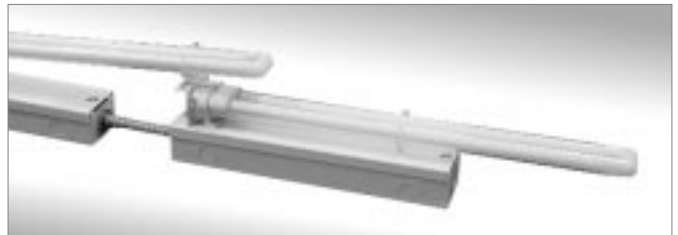

FLEXIBLE CONTINUOUS (available in 8 ft. lengths, assembled)

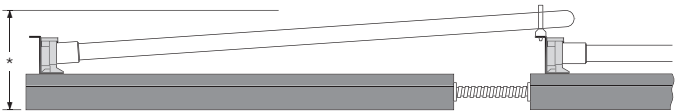


* = 4¹/₄" Sockets: G23d, GX23d, 2G11

TYPE CE 1500




CONTINUOUS END TO END




* = 2⁵/₈" Sockets: G23d, GX23d / 3" Socket: 2G11

TYPE DC 1500

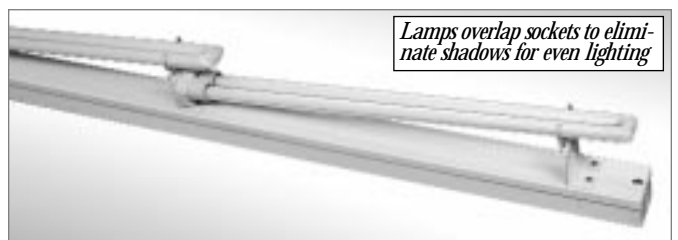

CONTINUOUS

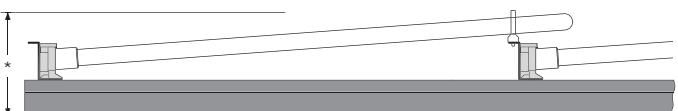

* = 4¹/₄" Sockets: G23d, GX23d, 2G11


TYPE AF 1500 FLUORESCENT SERIES ORDERING DATA

EXAMPLE: AF1500-113CF MAG 120 + RUN LENGTH

Type	Wattage	Lamp Type	Ballast	Voltage
AF 1500	+ 13	+ CF	+ MAG	+ 120
AF 1500 Channel	+ 13 watts	+ Compact Fluorescent	+ Magnetic 1 Lamp	+ 120 volts

CAT. NO.	LAMP/LUMENS	RATED LIFE	SOCKET	BALLAST	DIMENSIONS		MINIMUM RADIUS
COMPACT FLUORESCENT			BASE	VOLTAGE	A	B	
AF 1500-17CF	1-7WCF/400	10,000 hrs.	G23d	MAG 120	9"	3"	18"
AF 1500-19CF	1-19WCF/600	10,000 hrs.	G23d	MAG 120	9"	3"	18"
AF 1500-113CF	1-13WCF/950	10,000 hrs.	GX23d	MAG 120	9"	3"	18"
AF 1500-118TT	1-18WTT/1250	12,000 hrs.	2G11	EBX 120	11"	3"	36"
AF 1500-124/27TT	1-24W/27WTT/1800	12,000 hrs.	2G11	EBX 120	14"	3"	36"
AF 1500-136/39TT	1-36W/39WTT/2900	12,000 hrs.	2G11	EBX 120	18"	3"	36"
AF 1500-140TT	1-40WTT/3150	20,000 hrs.	2G11	EBX 120	23"	3"	36"
AF 1500-150TT	1-50WTT/4800	14,000 hrs.	2G11	EBX 120	23"	3"	36"
AF 1500-155TT	1-55WTT/4800	12,000 hrs.	2G11	EBX 120	23"	3"	36"

Featuring Individual Ballasts

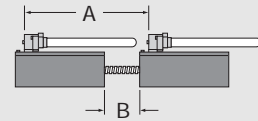


TYPE BF 1500 FLUORESCENT SERIES ORDERING DATA

EXAMPLE: BF1500-140TT EBX 120 + RUN LENGTH

Type	Wattage	Lamp Type	Ballast	Voltage
BF 1500	+ 40	+ TT	+ EBX	+ 120
BF 1500 Channel	+ 40 watts	+ Twin Tube Fluorescent	+ Electronic 1 Lamp	+ 120 volts

CAT. NO.	LAMP/LUMENS	RATED LIFE	SOCKET	BALLAST	DIMENSIONS		MINIMUM RADIUS
COMPACT FLUORESCENT			BASE	VOLTAGE	A	B	
BF 1500-113CF	1-13WCF/950	10,000 hrs.	GX23d	MAG 120	9"	3"	18"
BF 1500-118TT	1-18WTT/1250	12,000 hrs.	2G11	EBX 120	10"	3"	36"
BF 1500-124/27TT	1-24W/27WTT/1800	12,000 hrs.	2G11	EBX 120	13"	3"	36"
BF 1500-136/39TT	1-36W/39WTT/2900	12,000 hrs.	2G11	EBX 120	16"	3"	36"
BF 1500-140TT	1-40WTT/3150	20,000 hrs.	2G11	EBX 120	21"	3"	36"
BF 1500-150TT	1-50WTT/4800	14,000 hrs.	2G11	EBX 120	21"	3"	36"
BF 1500-155TT	1-55WTT/4800	12,000 hrs.	2G11	EBX 120	21"	3"	36"

Featuring Individual Ballasts

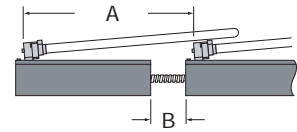


TYPE CE 1500 FLUORESCENT SERIES ORDERING DATA

EXAMPLE: DC1500-18TT EBX 120 + RUN LENGTH

Type	Wattage	Lamp Type	Ballast	Voltage
CE 1500	+ 18	+ TT	+ EBX	+ 120
CE 1500 Channel	+ 18 watts	+ Twin Tube Fluorescent	+ Electronic 1 or 2 Lamps	+ 120 volts

CAT. NO.	LAMP/LUMENS	RATED LIFE	SOCKET	BALLAST	DIMENSIONS
COMPACT FLUORESCENT			BASE	VOLTAGE	A
CE 1500-7CF	7WCF/400	10,000 hrs.	G23d	MAG 120	5"
CE 1500-9CF	9WCF/600	10,000 hrs.	G23d	MAG 120	8"
CE 1500-13CF	13WCF/950	10,000 hrs.	GX23d	MAG 120	9"
CE 1500-18TT	18WCF/1250	12,000 hrs.	2G11	EBX 120	11"
CE 1500-24/27TT	24/27TT/1800	12,000 hrs.	2G11	EBX 120	14"
CE 1500-36/39TT	36/39TT/2900	12,000 hrs.	2G11	EBX 120	18"
CE 1500-40TT	40WTT/3150	20,000 hrs.	2G11	EBX 120	24"
CE 1500-50TT	50WTT/4800	14,000 hrs.	2G11	EBX 120	24"
CE 1500-55TT	55WTT/4800	12,000 hrs.	2G11	EBX 120	24"




Supplied in 18", 24", 36", 48", 72", and 96" lengths

TYPE DC 1500 FLUORESCENT SERIES ORDERING DATA

EXAMPLE: DC1500-24TT EBX 120 + RUN LENGTH

Type	Wattage	Lamp Type	Ballast	Voltage
DC 1500	+ 24	+ TT	+ EBX	+ 120
DC 1500 Channel	+ 24 watts	+ Twin Tube Fluorescent	+ Electronic 1 or 2 Lamps	+ 120 volts

CAT. NO.	LAMP/LUMENS	RATED LIFE	SOCKET	BALLAST	DIMENSIONS
COMPACT FLUORESCENT			BASE	VOLTAGE	A
DC 1500-13CF	13WCF/950	10,000 hrs.	GX23d	MAG 120	5 1/4"
DC 1500-18TT	18WTT/1250	12,000 hrs.	2G11	EBX 120	7 1/4"
DC 1500-24/27TT	24W/27WTT/1800	12,000 hrs.	2G11	EBX 120	12"
DC 1500-36/39TT	36W/39WTT/2900	12,000 hrs.	2G11	EBX 120	15"
DC 1500-40TT	40WTT/3150	20,000 hrs.	2G11	EBX 120	20 3/4"
DC 1500-50TT	50WTT/4800	14,000 hrs.	2G11	EBX 120	20 3/4"
DC 1500-55TT	55WTT/4800	12,000 hrs.	2G11	EBX 120	20 3/4"



Supplied in 18", 24", 36", 48", 72", and 96" lengths

