

APPLICATIONS

- Architecturally Designed Precision Die-cast Aluminum Housing.
- Energy Saving High Intensity Super Bright Red or Green LED Illumination.
- Less Than 5 Watts Consumption.
- 25-Year LED Lamp Warranty.
- Advanced Electronic Circuitry.
- DC Emergency Backup - 90 Mins. with Test Switch - Ni-Cad Battery.
- NYC Approved, Calendar # 39363.
- Concealed Universal Chevron Style Arrows.
- Universal Side, Top, Ceiling or Surface Mounting.



SPECIFICATIONS

CONSTRUCTION: Precision die-cast aluminum housing with minimum 1/8" wall thickness.

FACEPLATE: Self-locking double cam hinged stencil faceplate of precision die-cast aluminum with minimum 1/8" wall thickness. Single or Double face. Full overlap Light-Leak Seal with spring lock door latch. 8" Stencil letters 1" stroke. Knockout universal directional chevron indicators are easily removed if required.

DIFFUSER PANEL: Durable Red or Green polycarbonate.



ELECTRICAL: Standard Dual Voltage 120/277 VAC Energy Efficient Electronic LED circuitry. Optional solid state emergency ni-cad battery backup 90 minutes, with LED charge indicator light and test switch. Optional 347V, 220V/50Hz and DC 6/12V—Consult Factory. Optional Incandescent, PL Fluorescent—Consult Factory.

FINISH: Standard satin-brushed aluminum faceplate with a clear anodized protective coating and matte acrylic black housing. Optional white and black faceplate and housing, and brushed aluminum housing. Custom colors—Consult Factory.


MOUNTING: Universal knockout cluster on back for mounting to single gang 3" / 4" octagon or 4" square junction boxes for single face surface installation. Die cast aluminum canopy supplied for side and top mounting. Deep canopy supplied with double face unit.

CERTIFICATION: The Legion Die-Cast Exit Series EXC8 is manufactured in accordance with U.L. and C.U.L. standard 924, ETL Listed and meets or exceeds OSHA standard, NEC Article 700 and Life Safety Code NFPA101 and bears the label of the I.B.E.W./AFL-CIO, Local #3.

LEGION® is a registered trademark of LEGION LIGHTING CO., INC.

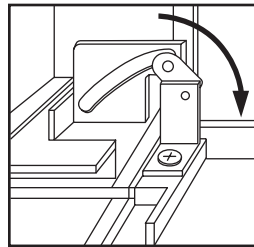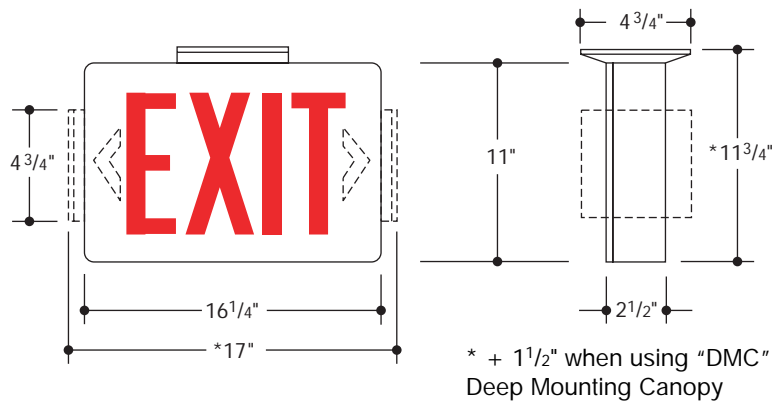

Self Locking Double Cam Action Hinges

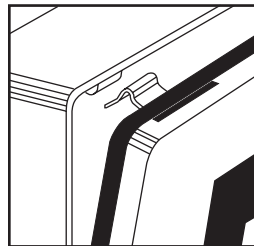

Full Overlap Light Leak Seal with Easy Access Spring Door Latch




Energy Star® and Logo are registered trademarks of the U.S. Govt. and EPA.

ORDERING INFORMATION

SPECIFY CATALOG NO. FROM LISTING BELOW

EXAMPLE:



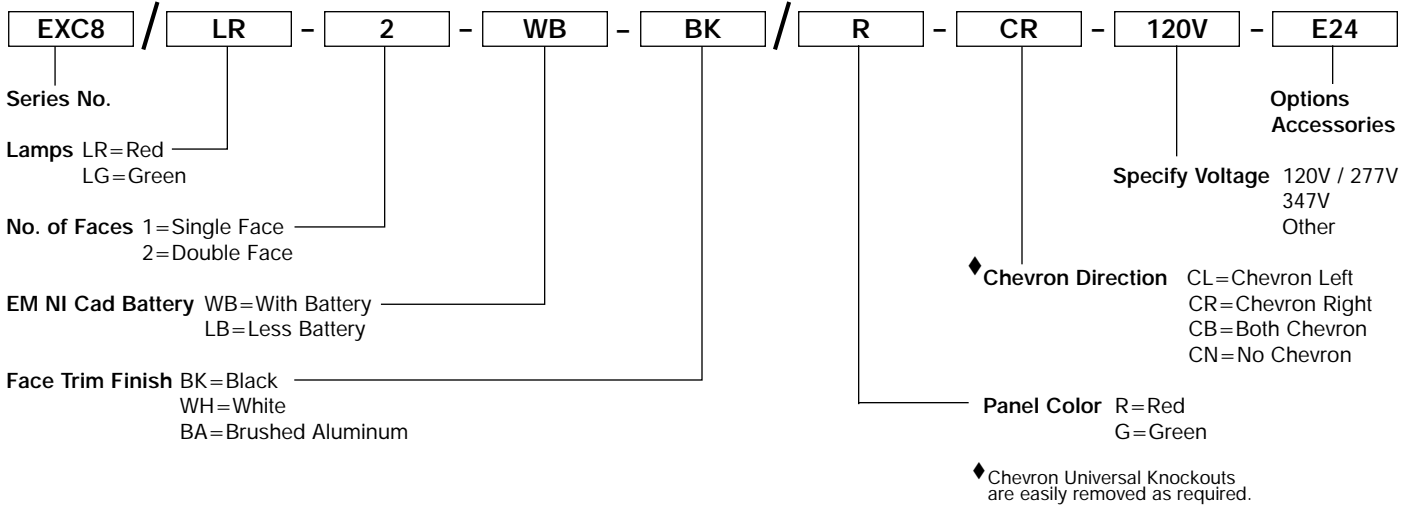


OPTIONS


- ** Suffix "AT" after cat. no. for Automatic Diagnostic Tester.
- ** Suffix "LD" after cat. no. for LED Downlight.
- ** Suffix "FL" after cat. no. for Flasher.
- ** Suffix "BZ" after cat. no. for Buzzer.
- ** Suffix "FZ" after cat. no. for Flasher and Buzzer.
- ** Suffix "A1" after cat. no. for Fire Alarm Interface with Flasher.
- ** Suffix "A2" after cat. no. for Fire Alarm Interface with Flasher and Buzzer.
- ** Suffix "6V" after cat. no. for 6 volt DC Remote Emergency Power.
- ** Suffix "12V" after cat. no. for 12 volt DC Remote Emergency Power.
- ** Suffix "2C/1" after cat. no. for Two AC Inputs 120V / 120V.
- ** Suffix "2C/17" after cat. no. for Two AC Inputs 120V / 277V.
- ** Suffix "2C/77" after cat. no. for Two AC Inputs 277V / 277V.
- Suffix "FPM" after cat. no. for Floor Proximity Mounting.
- Suffix "DL" after cat. no. for Damp Location listing.

ACCESSORIES

- Suffix "E12" after cat. no. for 12" Pendant Mount Kit.
- Suffix "E24" after cat. no. for 24" Pendant Mount Kit.
- Suffix "ER12" after cat. no. for 12" Extension Rod.
- Suffix "ER24" after cat. no. for 24" Extension Rod.
- Suffix "EL1" after cat. no. for (1) 6V Emergency Light Remote Mounted.
- Suffix "TP" after cat. no. for Tamper Resistant Hardware.
- Suffix "TPT" after cat. no. for Tamper Resistant Tool.
- * Suffix "SMC" after cat. no. for Single Mount Canopy Die-Cast Unit.
- ** Suffix "DMC" after cat. no. for Deep Mount Canopy Die-Cast Unit.
- * Shallow Mounting Canopy included with all Units.
- ** Deep Mounting Canopy included with Double Face Signs.
- (Double Face Exit can only use "DMC" Canopy).

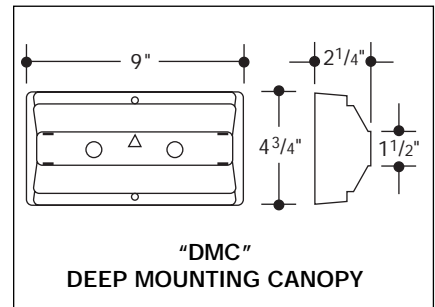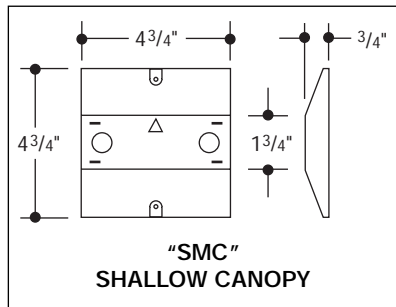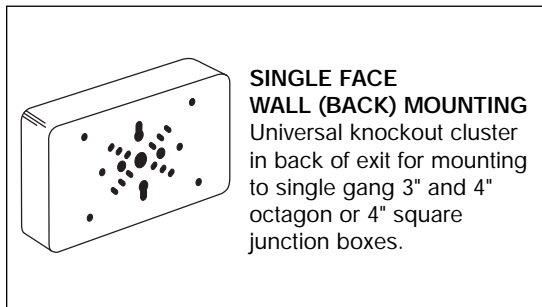

CHEVRON DIRECTION

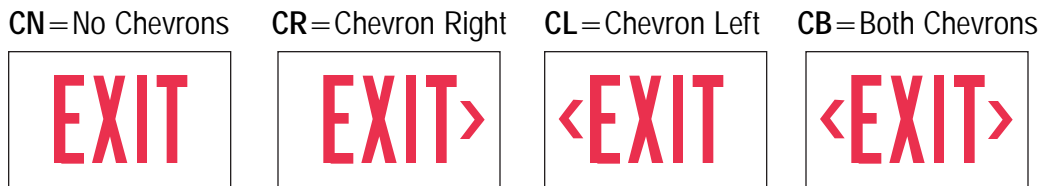

Information supplied primarily for illustrative purposes, subject to change. Consult factory for verification and minimum quantity orders.

