

## APPLICATIONS

Unparalleled in reliability, the EXDLX series utilizes photoluminescent technology which absorbs and stores ambient light. In the event of a power failure, or a smoky environment, the EXDLX is a clearly recognizable egress sign. Since there is no electricity required, the EXDLX is a safer signage solution, which saves on maintenance and energy costs. The EXDLX is NON-TOXIC and NON-RADIOACTIVE which eliminates disposal fees. Surface ceiling, wall or end mount applications



## SPECIFICATIONS

The EXDLX series is constructed of durable .035 steel with integrated, high grade photo luminescent panel, or photoluminescent panel only with silk screened font. The steel housing is available in black (standard), white, green, and safety red. Silk screened lettering is available in both red and green.

### FEATURES


- Consumes no electricity
- 100% reliable, no internal parts to brownout
- Non-toxic, non-radioactive
- Low-cost, easy installation
- Configured for universal mounting
- Low profile
- Can be used for high and/or low level installations
- Field adjustable chevrons
- 25+ years life expectancy
- UL924 listed, meets NFPA Life Safety Code 101 & OSHA requirements
- Meets current building codes: IBC, ICBO, BOCA, & SBCCI, NFPA5000
- Ideal for wet or hazardous locations
- Visible at 50' during a blackout condition



\* face height for plastic housing  
\*\* face height for metal housing with mounting tabs

6" High Stencil Letters, 3/4" Stroke

## ORDERING INFORMATION

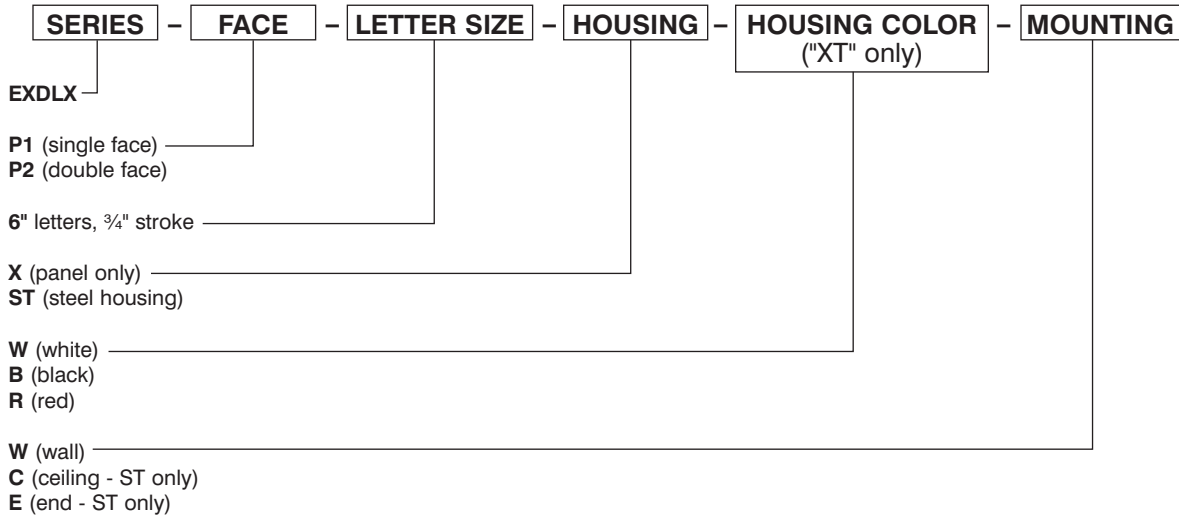

.....

## EXDLX BUILDER

SERIES	FACE	LETTER SIZE	HOUSING	HOUSING COLOR ("xt" only)	MOUNTING



Information supplied primarily for illustrative purposes, subject to change.  
Consult factory for verification and minimum quantity orders.

