

APPLICATIONS

The EXLC1E series is designed to provide a durable, attractive and maintenance-free exit sign. The EXLC1E is manufactured from sturdy die-cast aluminum and comes standard with a brushed aluminum convex face and black housing. A universal mounting canopy is also included for ceiling and end mount applications. Comes standard configured with high-output LED technology, available in red or green. AC only and Self-powered versions are available. Damp location rated and suitable for ceiling, wall and end mounting.



SPECIFICATIONS

INTERNAL SPECIFICATIONS

AC ONLY: comes standard configured with high-output LED technology, 120/277VAC input.

SELF-POWERED: Comes standard configured with high-output LED technology, 120/277VAC input. Nickel-cadmium batteries provide a minimum 90 minutes of emergency duration. Optional 120 minute duration battery is available. Solid state charger & transfer.

EXTERNAL SPECIFICATIONS

The EXLC1E series is constructed from durable die-cast aluminum and comes standard with a brushed aluminum face plate(s) and a black housing. Single or double face versions must be specified. Available in custom epoxy-based powder coat finishes (please specify). Universal mounting pattern and key hole slots are stamped into the housing. Removable chevron arrows are standard on each unit. The self-powered LED version comes standard with an external LED status indicator and test switch.

DIE-CAST DESIGN

The excellent visual performance and architecturally pleasing design makes the EXLC1E series the premier choice for applications requiring the durability and the craftsmanship of die-cast aluminum exit signs. The standard brushed aluminum face blends well with any setting and provides a clean, modern look. The die-cast aluminum construction provides the EXLC1E series with exceptional strength and rigidity.

ELECTRICAL SPECIFICATIONS

The EXLC1E series is configured with high-output LED lamps. Standard with 120/277VAC input. All LED versions consume only 1.1W nominal power. Optional emergency illumination is provided by the LED light source at the following wattages:


6VDC - 0.5 Watts

12VDC - 1.5 Watts

24VDC - 3.5 Watts

MECHANICAL SPECIFICATIONS

The EXLC1E series is constructed from durable die-cast aluminum. Universal mounting pattern and key hole slots are stamped on the back. A surface mount conduit entry knockout is also provided.

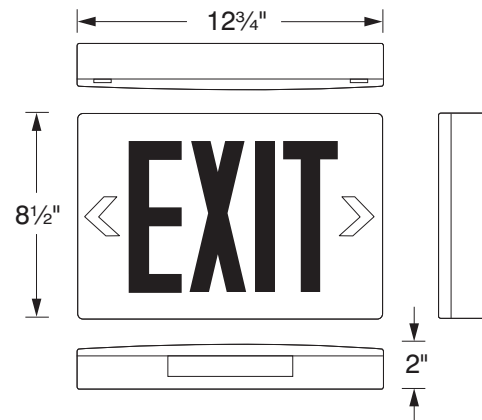

6" High Stencil Letters, 3/4" Stroke
8" High Stencil Letters, 1" Stroke

Field removable directional chevron arrows are standard. The EXLC1E is supplied standard with a brushed aluminum face(s) and a black baked powder coat finished housing. Other colors are available, including custom color matching, please specify. The face plate is held securely in place with four reinforcement clips, that allow for complete access to the interior of the sign. No visible screws, nuts or fasteners are used in the face plate design.

SELF POWERED VERSIONS

The EXLC1E-SA series is designed to operate on battery power in the event of a regular/mains power failure. Both the battery and charger are completely contained within the standard enclosure. There are no external components and no alterations made to the external dimensions of the standard sign.


BATTERY TECHNOLOGY

The EXLC1E-SA is designed with a maintenance free, Nickel-Cadmium battery providing a minimum emergent duration of 90 minutes. Recharge time is twenty-four (24) hours.

LEGION® is a registered trademark of LEGION LIGHTING CO., INC.

12/09

ORDERING INFORMATION

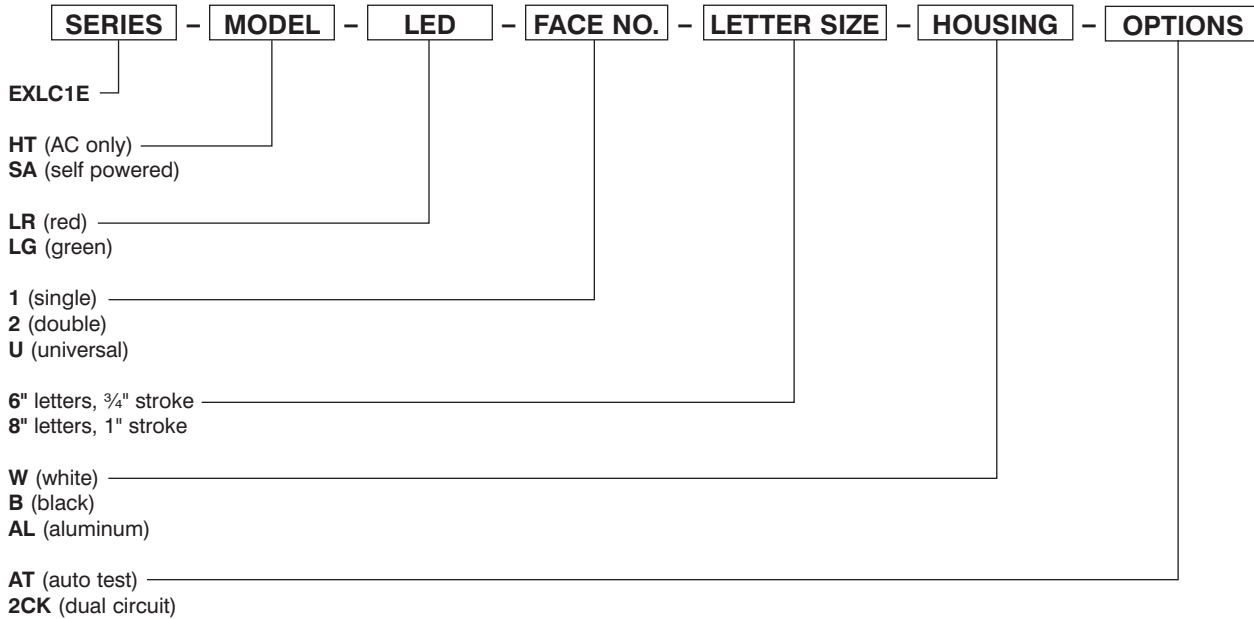

EXLC1E BUILDER

SERIES	MODEL	LED	FACE NO.	LETTER SIZE	HOUSING	OPTIONS



Information supplied primarily for illustrative purposes, subject to change.
Consult factory for verification and minimum quantity orders.